METAL PLESS


SPEC SHEET

# RUBBERMAXX

## SIZES & SPECIFICATIONS


| MODEL | AVAILABLE EDGES | BLADE DIMENSIONS | | | WING SIZE (EACH SIDE) | VEHICLE | APPLICATION | WING / GATE TYPE | APPROX. WEIGHT |
|---|---|---|---|---|---|---|---|---|---|
| | | BOX | HEIGHT | EXTENDED | | | | | |
| **RBX 0626-11** | RB - Without Angulation (ReverseMaxx) - RB - With Angulation (Plowmaxx) - RB - With Angulation (Agrimaxx) | 6' | 26" | 11' | 2.5' | SKID STEER<br>BACKHOE<br>TRACTOR | 4,000 lb - 6,000 lb | Hydraulic wings depending on configuration | 900 lb |
| **RBX 0730-12** | RB - With Angulation (Plowmaxx) - RB - With Angulation (Agrimaxx) | 7' | 30" | 12' | 2.5' | | 6,001 lb - 12,000 lb | Hydraulic wings depending on configuration | 1,350 lb |
| **RBX 0830-13** | RB - Without Angulation (ReverseMaxx) - RB - With Angulation (Plowmaxx) - RB - With Angulation (Agrimaxx) | 8' | 30" | 13' | 2.5' | | 6,001 lb - 12,000 lb | Hydraulic wings | 1,800 lb |
| **RBX 0930-14** | RB - Without Angulation (ReverseMaxx) - RB - With Angulation (Plowmaxx) - RB - With Angulation (Agrimaxx) | 9' | 30" | 14' | 2.5' | | 6,001 lb - 12,000 lb | Hydraulic wings | 2,250 lb |
| **RBX 0736-14** | RB - Without Angulation (ReverseMaxx) - RB - With Angulation (Plowmaxx) - RB - With Angulation (Agrimaxx) | 7' | 36" | 14' | 3.5' | BACKHOE<br>TRACTOR | 12,001 lb - 18,000 lb | Hydraulic wings | 1,550 lb |
| **RBX 0836-15** | RB - Without Angulation (ReverseMaxx) - RB - With Angulation (Plowmaxx) - RB - With Angulation (Agrimaxx) | 8' | 36" | 15' | 3.5' | | 12,001 lb - 18,000 lb | Hydraulic wings depending on configuration | 1,550 lb (RB - Without Angulation (ReverseMaxx)) · 1,910 lb (RB - With Angulation (Plowmaxx), RB - With Angulation (Agrimaxx)) |

## AVAILABLE EDGES




Rubber edges are flexible, tough and quiet, and at the same time less likely to damage delicate surfaces.

## BLADE POSITIONS

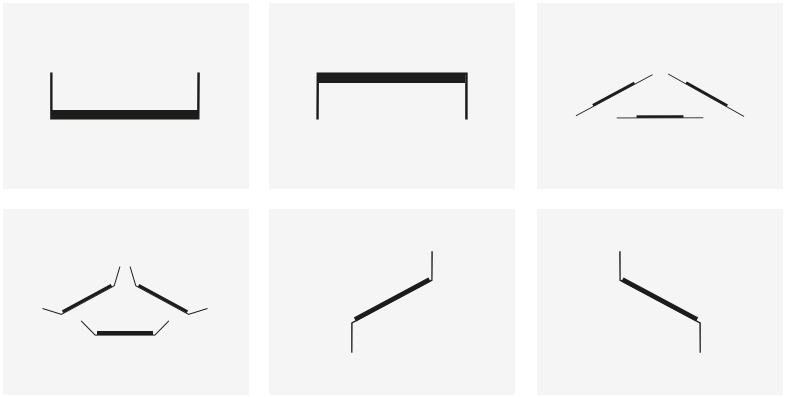

Specifications are subject to change without notice.