RAGNARTECH

Experience Driven Innovation



9400 HORIZONTAL GRINDER/CHIPPER

UNLEASH POWER & EFFICIENCY

KEY FEATURES

DESIGNED FOR THE OPERATOR. **BUILT FOR THE JOB.**

From the first startup to the final task of the day, the 9400 series is designed around the people who use it. Thoughtful engineering enhances visibility, control, and serviceability, while rugged construction built with **Strenx Performance Steel** delivers a stronger, lighter, and safer machine. Every feature works together to support productivity, comfort, and confidence in the field, even in the most demanding conditions.

STATIONARY



PORTABLE



TRACK DOLLY SYSTEM



THROWER





STRENX®

Strength You Can Trust, Engineered with Strenx® Performance Steel

1 TRACK ASSEMBLY

Elevates machine in the front and the back independently as well as straight up or down to connect both dolly and tractor without outriggers. It also provides a sloped feed conveyor in either direction for maximum efficiency.

2 DOLLY OPTION

Comes with air suspension, 385 super single tires, toolbox and extra screen holders, and a bolt-on kingpin.

3 HEAD PULLEY MAGNET OPTION

Removes metal contamination.

4 OVER-BAND MAGNET OPTION

Removes metal contamination.

5 HYDROSTATIC CONTROLS

Closed loop hydraulics, IQAN controls with wireless radio remote control.

6 ENGINE OPTIONS

908 hp John Deere Or 1050hp C27 Cat, Flexxaire reversing radiator fan, service points located to one side of the engine easily accessible from service platform, and a PT Tech hydraulic clutch.

7 30-50% FUEL SAVINGS

Through the combination of innovative grinder design, feed system increased force and matching engine choice, the **9400 operates at between 30-50% fuel savings over other grinders! A feature that by itself Pays for the Machine.**

8 ACCESS HOOD

Clamshell design for improved serviceability, hydraulically extendable service platform for easy access.

9 STANDARDIZED COMPONENTS


We have gone to great lengths to standardize components everywhere it is practically possible. One hydraulic seal kit covers all rebuildable cylinders, and all pins, bushings, etc. are consistent throughout. The machine shares many components with the 9700, reducing both machine cost and parts inventory while ensuring maximum uptime.

10 CHASSIS DESIGN

Light but strong design, all Strenx 700 material, built in discharge conveyor with superior frame design that prevents material build up under belt, 350-gallon fuel tank mounted above discharge belt to prevent material build up on tank.

TECHNICAL FEATURES


PRECISION & ENGINEERING. **AT EVERY LEVEL.**

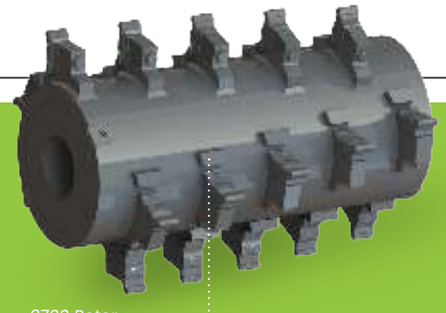

9700 Rotor



9400 Brute Rotor

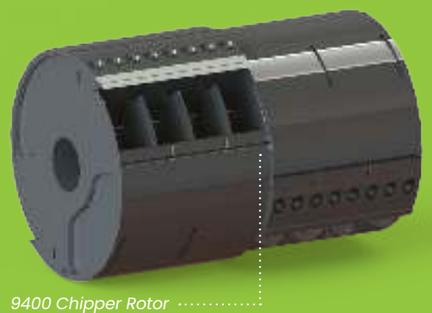

9400 Chipper Rotor

TRACK LIFT SYSTEM

- The integrated track lift system allows the machine to be raised hydraulically, making connection to the dolly fast, simple, and safe.
- Once connected, the system can hydraulically lift the dolly off the ground, enabling operators to move both the machine and dolly without the need for a tractor or additional equipment.



ROTOR OPTIONS

9700/9400 Rotor

- Forged thick drum with 20 2 1/2" wide weld-on hammers
- 2-3" wide tips using a singler 1 1/8" bolt
- Forged replacable face plates with dual anti-rotation feature
- Designed for forestry debris and mulch production

9400 Brute Rotor Quick Exchange

- Forged thick drum with 20 3" wide weld-on hammers
- 4" wide reversible tips using two M24 Bolts
- Forged replacable face plates with dual anti-rotation feature
- Designed for mixed C&D debris

9400 Chipper Rotor Quick Exchange


- 2 cuts per revolution
- 4 knives, chip length from 1/4" (6mm) - 2 1/2" (60mm)

FEED CONVEYOR

- Fluted design for ease of feeding trees and mixed debris.
- Heavy-duty open 5-strand chain.
- Built-in screen option for finer debris and rocks before material enters a chipper or grinder.
- All Hardox 450 and Strenx 700 construction.
- Poclain MS 18 drive motor with speed feedback.
- Tail pulley bearing mounting designed to prevent material buildup.

HOG BOX DESIGN

- Bearings mounted away from the hog box so no debris can reach inside the bearing seal, resulting in longer bearing life and eliminating the need for daily greasing. The machine can run 500–1,000 hours between grease changes.
- Protected by shear pins equipped with a break detection system alerting the operator to partially or completely fractured condition, so repairs can be performed before additional damage is done. Preventing down time and costly repairs.
- Large pin and pin bosses with replaceable bushings.
- Bolt-in 20mm thick side liners.
- All components line-bored after fabrication for precision fit.
- 36-inch diameter top feed roll with built-in MS35 Poclain motor powered by a hydrostatic 420 bar pump for unparalleled feed force.
- Hog box bolted to the chassis for ease of future maintenance.
- Top feed roll teeth are forged, with 50 percent carbided for maximum life and the remaining 50 percent left sharp for superior grip when feeding logs and trees.

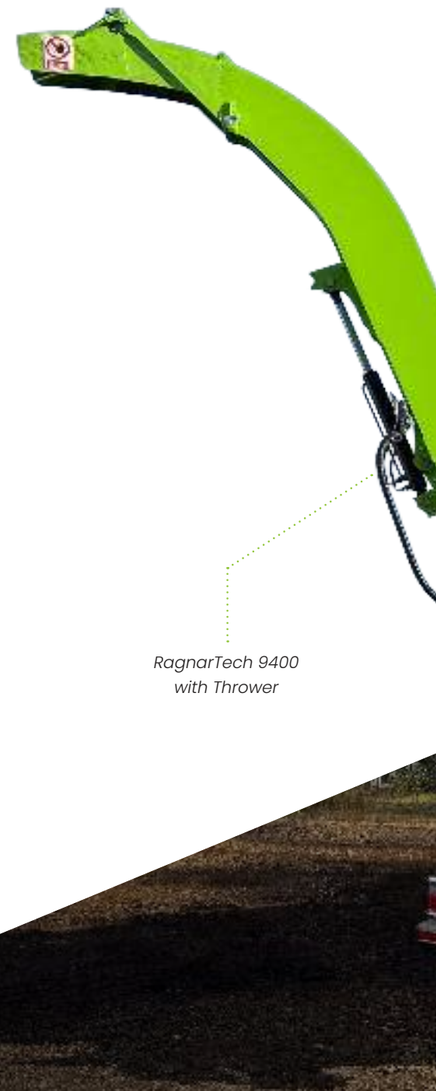


RagnarTech 9400 with Thrower

SPECIFICATIONS

BUILT TO **EXACTING STANDARDS.**

DETAILS	SPECS
Engine Package	John Deere 908hp Tier V - Optional CAT C27 1050 HP Tier V
Rotor Speed	450–1000rpm
Feed Opening (Width x Height)	57″ x 44″ (1.45 × 1.1 m)
Feed Conveyor Length	180″ (4.57 m)
Machine Weight	77,000 - 90,000 lbs (34,927–40,023 kg) pending options
Dolly Option	5,000lbs (2,268 kg)
Transport Height	162″ (4.1 m) on lowboy, 152″ (3.9 m) on dolly
Discharged Height	188″ (4.8 m) track lowered or 238″ (6 m) tracks raised
Transport Length	514″ (13.1 m)
Operational Length	625″ (15.9 m)
Overall Width	117 7/8″ (2.99 m)

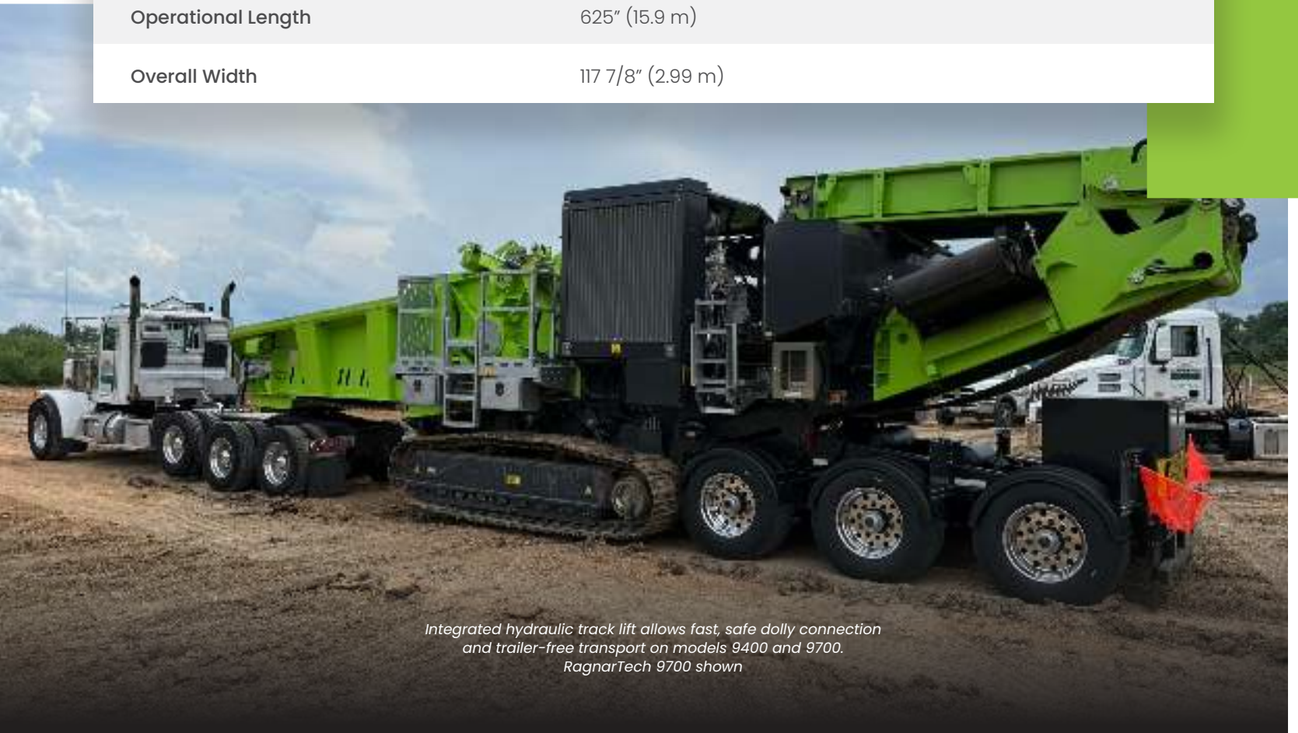

Integrated hydraulic track lift allows fast, safe dolly connection and trailer-free transport on models 9400 and 9700. RagnarTech 9700 shown

ABOUT US

BUILT ON EXPERIENCE. **DRIVEN BY INNOVATION.**

RagnarTech was built by industry professionals with decades of hands-on experience designing, building, and supporting grinding equipment and attachments. The company was founded to protect innovation that often disappears under cor–porate ownership, keeping critical engineering decisions in the hands of experienced designers and fabricators who understand real-world job site demands.

As a factory-direct manufacturer, RagnarTech works closely with customers to develop equipment tailored to specific applications. Designed and assembled in the United States using premium Scandinavian steel and high-quality components, RagnarTech machines are engineered to be lighter, stronger, and more reliable in the most demanding environments.



RagnarTech SplitMax SM48 shown

EXPERIENCE DRIVEN ENGINEERING

Decades of hands-on industry experience guide every design decision, ensuring machines are built by people who understand real-world applications.

FACTORY-DIRECT & CUSTOM BUILT

Direct collaboration with customers allows equipment to be designed, refined, and customized to specific operating needs, not one-size-fits-all solutions.

PREMIUM MATERIALS & U.S. ASSEMBLY

Designed and assembled in the United States using high-quality Scandinavian steel and proven components for lighter, stronger, more durable machines.

RAGNARTECH

Experience Driven Innovation

USA

1-603-244-7575

info@ragnartech-inc.com

44 Iron Horse Drive,
Fremont, NH 03044 US

SWEDEN

+ 46-73-077-9353

info@ragnartechab.com

Vanga Torp 5, 617 90,
Skarblacka, Sweden

Dig deeper at
ragnartech-inc.com